



2405 Ludelle St. • Fort Worth, TX, USA 76105
1-888-744-4880 • www.xssights.com

CSAT GAT™

XS CSAT GAT™

Glass Assault Tool

The GAT is designed to penetrate car side and back window glass while enabling the operator to keep their hands on their weapon.

- Penetrates "Tempered" or "Safety Glass" with ease
- Assembled from tough, anodized, aluminum with a Tungsten Carbide Cutter
- Made in the USA

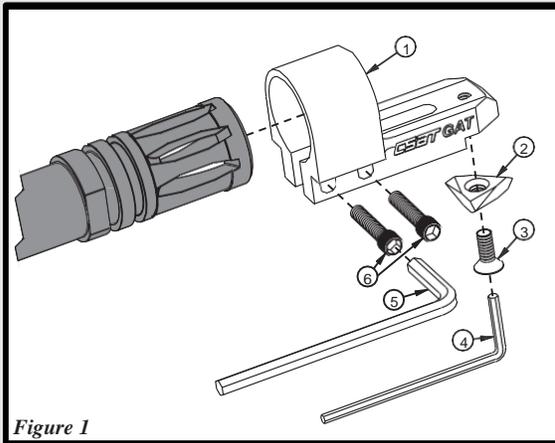


Figure 1

- 1 GAT Body
- 2 Cutting Insert
- 3 Cutting Insert Screw
- 4 5/64" Hex Wrench
- 5 9/64" Hex Wrench
- 6 Mounting Screws



2405 Ludelle St. • Fort Worth, TX, USA 76105
1-888-744-4880 • www.xssights.com

CSAT GAT™

XS CSAT GAT™

Glass Assault Tool

The GAT is designed to penetrate car side and back window glass while enabling the operator to keep their hands on their weapon.

- Penetrates "Tempered" or "Safety Glass" with ease
- Assembled from tough, anodized, aluminum with a Tungsten Carbide Cutter
- Made in the USA

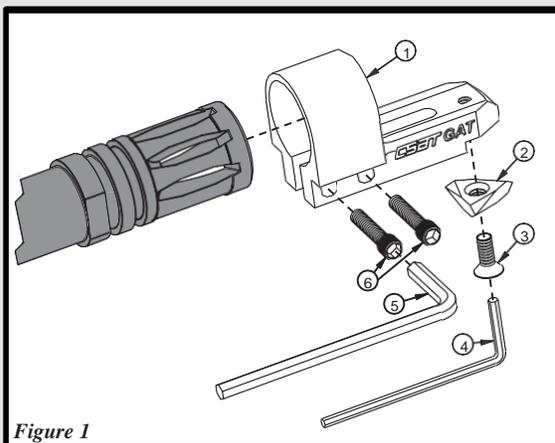


Figure 1

- 1 GAT Body
- 2 Cutting Insert
- 3 Cutting Insert Screw
- 4 5/64" Hex Wrench
- 5 9/64" Hex Wrench
- 6 Mounting Screws



AR-GAT™ for AR-15/M-4's std. A-1 & A-2 flash hider (GA-0000T-1)

RU-GAT™ for Ruger flash hider (GA-0001T-1) | **SP-GAT™** for 1.5" Dia. Suppressor (GA-0003T-1)

Installation:

1. Make sure the firearm is **unloaded**.
2. Remove the magazine and **check the chamber**.
3. A) AR-GAT™ & RU-GAT™
Slide the GAT over the muzzle and position so cutting insert is at 6 o'clock (figure 2)
B) SP-GAT™
Slide the GAT over the suppressor and position so cutting insert is at 12 o'clock
4. Tighten the two mounting screws.
5. Mounting Screws have BLUE Thread Locker already on the threads so the GAT may be removed after installation.

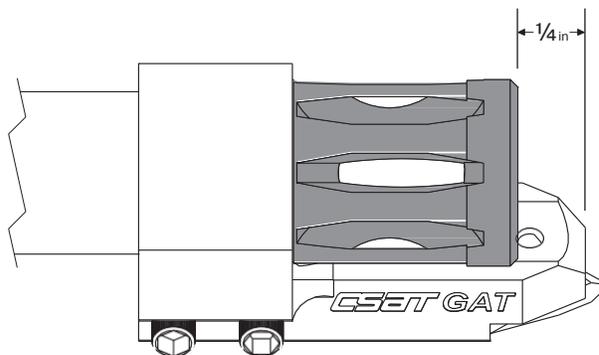


Figure 2

CAUTION

WHEN UTILIZING GAT ALWAYS WEAR EYE PROTECTION AND GLOVES. ENSURE WEAPON IS ON SAFE AND KEEP FINGER OFF OF THE TRIGGER.

THE CSAT GAT IS DESIGNED FOR TRAINED LAW ENFORCEMENT & MILITARY PERSONNEL ONLY. XS SIGHT SYSTEMS, INC. IS NOT RESPONSIBLE FOR INJURY OR DAMAGE OCCURRING FROM THE MISUSE OF THE GAT.



© Copyright 2017 XS Sight Systems, Inc.
All Rights Reserved

AR-GAT™ for AR-15/M-4's std. A-1 & A-2 flash hider (GA-0000T-1)

RU-GAT™ for Ruger flash hider (GA-0001T-1) | **SP-GAT™** for 1.5" Dia. Suppressor (GA-0003T-1)

Installation:

1. Make sure the firearm is **unloaded**.
2. Remove the magazine and **check the chamber**.
3. A) AR-GAT™ & RU-GAT™
Slide the GAT over the muzzle and position so cutting insert is at 6 o'clock (figure 2)
B) SP-GAT™
Slide the GAT over the suppressor and position so cutting insert is at 12 o'clock
4. Tighten the two mounting screws.
5. Mounting Screws have BLUE Thread Locker already on the threads so the GAT may be removed after installation.

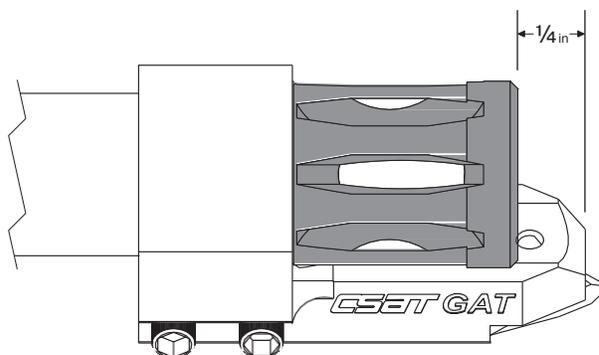


Figure 2

CAUTION

WHEN UTILIZING GAT ALWAYS WEAR EYE PROTECTION AND GLOVES. ENSURE WEAPON IS ON SAFE AND KEEP FINGER OFF OF THE TRIGGER.

THE CSAT GAT IS DESIGNED FOR TRAINED LAW ENFORCEMENT & MILITARY PERSONNEL ONLY. XS SIGHT SYSTEMS, INC. IS NOT RESPONSIBLE FOR INJURY OR DAMAGE OCCURRING FROM THE MISUSE OF THE GAT.



© Copyright 2017 XS Sight Systems, Inc.
All Rights Reserved